


225206-002-SANTORINI CHANDELIER-MATTE WHITE PLASTER

PARTS ENCLOSED:

ITEM	DESCRIPTION	QTY.
(A)	Mounting plate	1
(B)	Mounting Plate Screws	2
(C)	Canopy	1
(D)	Canopy Screw	4
(E)	Chandelier	1
(F)	Bulb (not included)	2
(G)	Pipe with Loop & Bush	1
(H)	Canopy Bush	1
(I)	Extention Pipe	6 (18" - 2 Pcs, 12" - 2 Pcs, 6" - 2 Pcs)

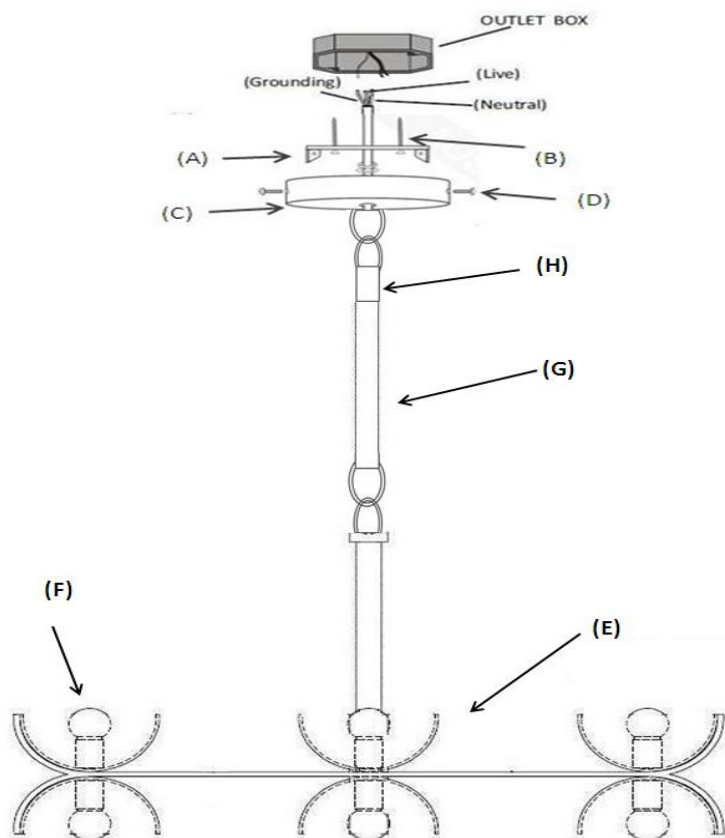

IMPORTANT SAFETY INSTRUCTIONS:

1. Use an authorized and certified electrician for consultation and installation. Electrician must be familiar with commercial - type applications of Chandelier.
2. It is recommended to use 8 x 25 - Watt maximum Type B standard bulb.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The manufacturer and distributor accept no liability for incorrect installation.
5. For indoor use only.
6. Keep away from children.

WARNINGS:

1. Turn - off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
2. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
3. Deviation from instruction may result in a risk of fire or electric shock. Please read all instructions completely before installation.

TO ASSEMBLE:

1. Carefully unpack the Chandelier. Do not discard any material till assembly is complete.
2. Turn OFF power to the Outlet box where the ceiling light will be installed.
3. Put the main body on flat/ clean surface. Place the threaded bush set (G) on top of center pipe post of Chandelier (E) & tighten the same by rotating it clock wise. While tightening the bush, make sure that wire does not rotate.
4. Included are (2) 6" pipe, (2) 12" pipe and (2) 18" pipes. Determine which of these you will need to reach your desired length. Detech the pipe (G) from Canopy Bush (H) to attach the desired amount of pipes, keeping the threaded part of the pipes.
5. Pass the wires throught the pipes and Canopy bush (H) and tighten the same againg by rotating it clockwise.
6. Remove the Mounting Plate (A) from the Canopy (C) by unscrewing Top Screw (D)
7. Attach Terminal Mounting Plate (A) to the ceiling Outlet Box.
8. Attach the Ground Wire, Neutral wire & Live wire to respective wires of the Outlet Box.
9. Install the Canopy (C) to Mounting plate (A) and fix it by Canopy Screw (D).
10. Install 8 Type B bulb maximum 25 watt (not included) into the Socket
11. Restore Power to the Outlet box and test ceiling light fixture.

CARE INSTRUCTIONS:

To clean, use a soft dry cloth only. Do not use any chemical or abrasive cleaners.