


**239977-001 - CLYDE CHANDELIER - JET BLACK**

PARTS ENCLOSED:

ITEM	DESCRIPTION	QTY.
(A)	Mounting plate	1
(B)	Mounting Plate Screws	2
(C)	Canopy	1
(D)	Canopy Screw	4
(E)	Chandelier	1
(F)	Extention Pipe	6 (18" - 2 Pcs, 12" - 2 Pcs, 6" - 2 Pcs)
(G)	Bulb ( not included )	5
(H)	Shade	5
(I)	Bush	4

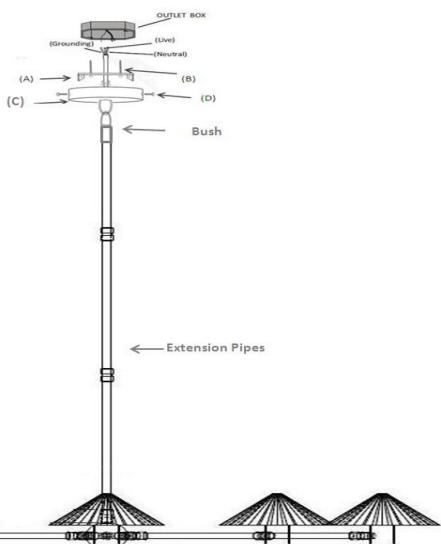

**IMPORTANT SAFETY INSTRUCTIONS:**

1. Use an authorized and certified electrician for consultation and installation. Electrician must be familiar with commercial - type applications of very heavy chandeliers.
2. It is recommended to use 5 x 25 - Watt maximum Type B standard bulb.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The manufacturer and distributor accept no liability for incorrect installation.
5. For indoor use only.
6. Keep away from children.

**WARNINGS:**

1. Turn - off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
- 2 To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
3. Deviation from instruction may result in a risk of fire or electric shock. Please read all instructions completely before installation.

**TO ASSEMBLE:**

1. Carefully unpack the Chandelier. Do not discard any material till assembly is complete.
2. Turn OFF power to the Outlet box where the ceiling light will be installed.
3. Included are (2) 6" pipe, (2) 12" pipe and (2) 18" pipes. Also 4 bush are included. Determine which of these pipe you will need to reach your desired length. At least '(1) 6" pipe must be used. ' Also, after every pipe tighten 1 bush too.
4. Pass the attached electric cable through 'the desired amount 'of pipes, keeping the threaded part of the pipes toward the ceiling.
5. Pass the wires through the pipes and Canopy bush and tighten the same again by rotating it clockwise.
6. Remove the Mounting Plate (A) from the Canopy (C) by unscrewing Top Screw (D)
7. Attach Terminal Mounting Plate (A) to the ceiling Outlet Box.
8. Attach the Ground Wire, Neutral wire & Live wire to respective wires of the Outlet Box.
9. Install the Canopy (C) to Mounting plate (A) and fix it by Canopy Screw (D).
10. Remove the shade ring from the socket by moving it anti-clockwise direction.
11. Place the shade onto the socket and tighten the shade ring.
12. Install Five Type B bulb maximum 25 watt (not included) into the Socket
13. Restore Power to the Outlet box and test ceiling light fixture.

**CARE INSTRUCTIONS:**

To clean, use a soft dry cloth only. Do not use any chemical or abrasive cleaners.