


AI 241152-001-MOZELLE PENDANT-AGED BRASS IRON

PARTS ENCLOSED:

ITEM	DESCRIPTION	QTY.
(A)	Mounting plate	1
(B)	Mounting Plate Screws	2
(C)	Canopy	1
(D)	Canopy Screw	4
(E)	Pendant	1
(F)	Bulb (not included)	2
(G)	Glass Diffuser	1
(H)	Metal Finial	1
(G)	Extention Pipe	18" - 2 Pcs, 12" - 2 Pcs, 6" - 2 Pcs

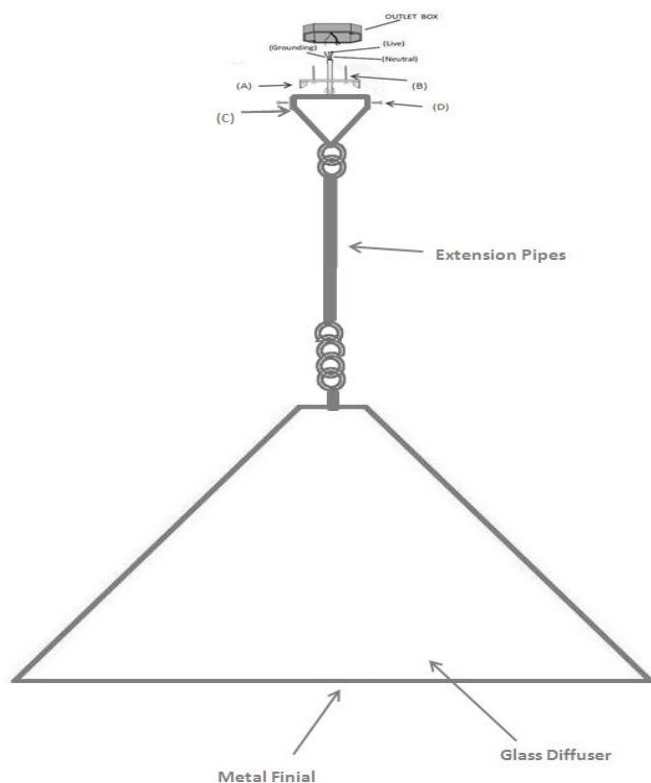

IMPORTANT SAFETY INSTRUCTIONS:

1. Use an authorized and certified electrician for consultation and installation. Electrician must be familiar with commercial - type applications of heavy pendants.
2. It is recommended to use 2 x 40 - Watt maximum Type A standard bulb.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The manufacturer and distributor accept no liability for incorrect installation.
5. For indoor use only.
6. Keep away from children.

WARNINGS:

1. Turn - off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
2. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
3. Deviation from instruction may result in a risk of fire or electric shock. Please read all instructions completely before installation.

TO ASSEMBLE:

1. Carefully unpack the pendant. Do not discard any material till assembly is complete.
2. Turn OFF power to the Outlet box where the ceiling light will be installed.
3. Included are (2) 6" pipe, (2) 12" pipe and (2) 18" pipes. Determine which of these you will need to reach your desired length. At least (1) 6" pipe must be used. Pass the attached electric cable through the desired amount of pipes, keeping the threaded part of the pipes toward the ceiling.
4. Finally tighten the extension pipe to ring / bush below the canopy.
5. Remove the Mounting Plate (A) from the Canopy (C) by unscrewing Top Screw (D)
6. Attach Terminal Mounting Plate (A) to the ceiling Outlet Box.
7. Attach the Ground Wire, Neutral wire & Live wire to respective wires of the Outlet Box.
8. Install the Canopy (C) to Mounting plate (A) and fix it by Canopy Screw (D).
9. Install 2 Type A bulb maximum 40 watt (not included) into the Socket
10. Place the Glass diffuser onto the post below the 'S' shape junction box and tighten the same with metal finial.
11. Restore Power to the Outlet box and test ceiling light fixture.

CARE INSTRUCTIONS:

To clean, use a soft dry cloth only. Do not use any chemical or abrasive cleaners.